


## TECHNICAL DATASHEET

# GVS10 Slate Vent

## GLIDEVALE SLATE VENT

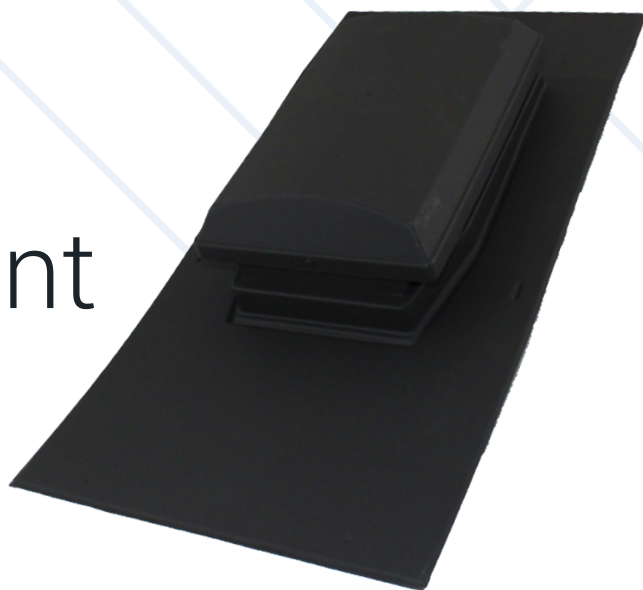

## Product Details

The Glidevale VS10 is an economy Slate Vent suitable for use on new build and remedial installations. This vent can be used for standard ventilation in a roof allowing timber and your house to breath and reduce sweating. It can also be used for output such as extractor fans or above ground soil pipes.

## Product Features

- Designed to avoid any build up debris inside the vent.
- Prevents entry of birds and large insects.
- Can be used at high or low level.
- Slate Grey cap blends with most man-made or natural slates.
- Clearly marked for cutting to various slate sizes.
- Suitable for Slate Roof Ventilation, Soil Pipe ventilation or Mechanical extraction.
- For new build or re-roofing applications.
- Suitable for roof pitches between 20° and 60°
- To suit 300 x 600mm double lap slates, man made or natural.

## Technical

Performance	Provides 10,000mm <sup>2</sup> effective ventilation area
Spacing to achieve:	10,000mm <sup>2</sup> /m; 1.0m
Airflow Resistance	15 litres/sec: 2.5 Pascals
	30 litres/sec: 11 Pascals
	60 litres/sec: 42.5 Pascals