


TECHNICAL DATASHEET RRCOP Copper Ridge Roll

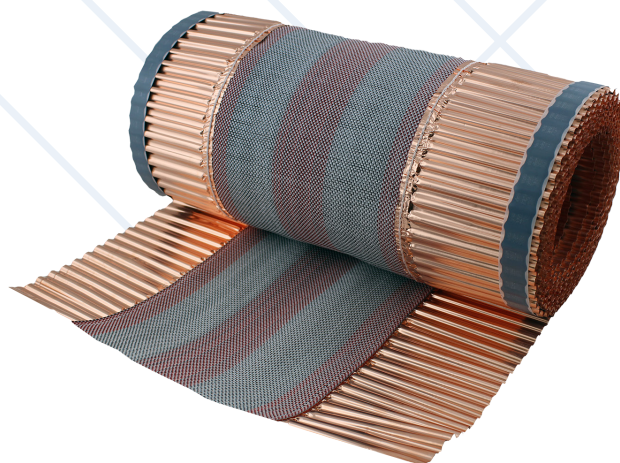

Product Details

Kytun™ Copper Roll-Fix is manufactured using a polypropylene geo-textile membrane, which is highly vapour permeable, yet completely weatherproof.

The central flat “spine” of the roll is reinforced for fixing to the ridge batten. The two corrugated side flaps are designed to drape

down over the top row of tiles on either side as the roll is opened out.

The lower corrugated portion of each flap is finished with copper which will help inhibit the growth of moss and lichens on the roof slope. The underside has a strip of self-adhesive butyl protected by an easy-release backing tape.

Product Specifications

Code:	RRCOP
Width:	390mm
Copper thickness:	100 microns
UV stabilisation:	Yes
Material:	Polypropylene (PP) and copper
Air permeability:	280 g/m ²
Density of butyl glue:	1,7 g/m ³
Width butyl glue:	15 mm/25mm + / - 1 mm
Thickness butyl glue:	1.5 mm + / - 1 mm
Min. installation temp.:	+ 5 ° C
Temp. resistance:	- 30 ° C to + 80 ° C
Water permeability:	5g/m ² /24h
Vitality:	15 years