


TECHNICAL DATASHEET

TEXTURED - FLA Lead Free Flashing

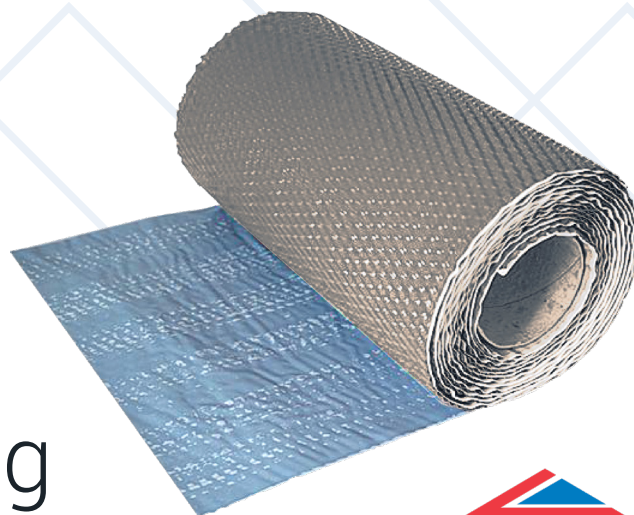

Product Details

Advantages and Benefits

- Highly flexible wall and chimney flashing tape
- Ideal for every kind of weather, durable, UV-resistant colour, fully recyclable
- Easy and durable fastening on roof covering due to butyl adhesive

Technical

Full Metal Product

- Highly durable and weather resistant
- High form- and function resistance
- Fully recyclable

Continuous Corrugation

- Stretch Factor - 30 %
- Perfect mouldability on tile surface
- Useable as chimney- or lateral wall flashing

Material

- Durable UV-resistant colour
- Available in almost all RAL colours
- Break-proof

Soil-resisting

- Fully covered with butyl
- easy application due to split release protective foil
- Fastening and sealing on tile surface

Technical Data

| | |
|--------------------|-------------------------------|
| Material | Aluminium |
| Width | 150mm / 300 mm / 450mm |
| Roll length | 5m |
| Corrugation height | 1,7 mm |
| Butyl width | 290 mm |
| Liner width | 297 mm |
| Standard colours | Black, Grey |
| Packaging | 1 roll/box • 144 boxes/pallet |